

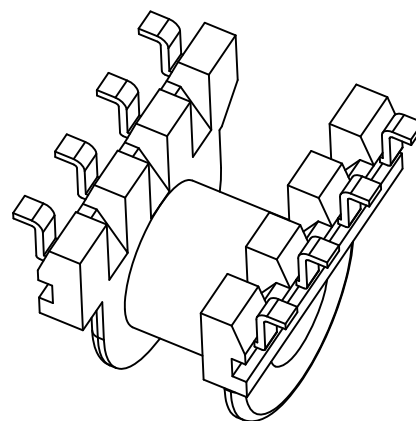
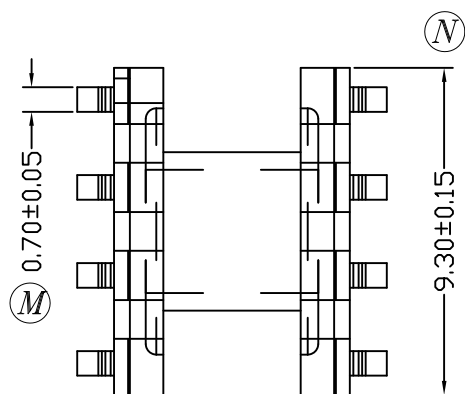
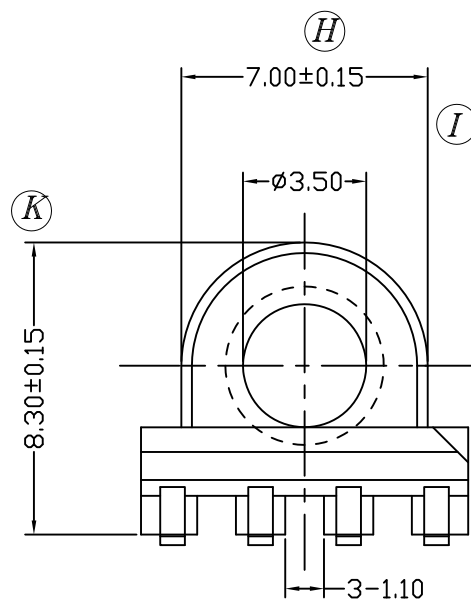
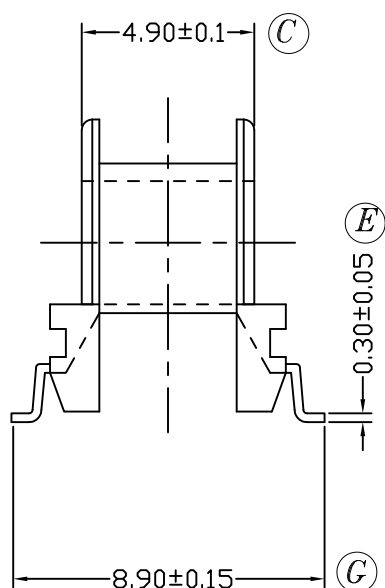
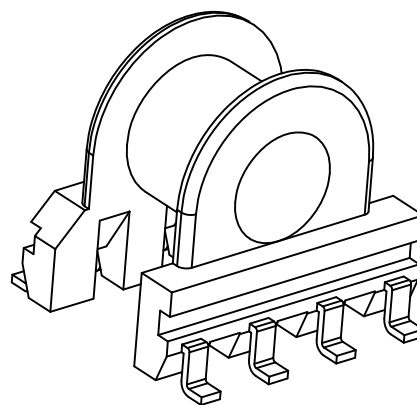


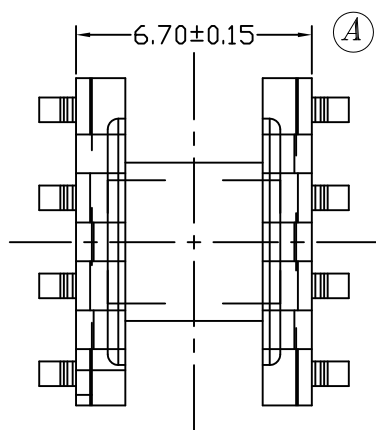

100%Matte Tin and Bright Nickel
电镀厚度:Nickel(1-3 μ m) Tin(3-7 μ m)

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
0	初版发行		MAR 15'08				
1	整理发行		MAY.28.09				

DRAWN & DRAFTED BY	LIANG TAO	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	COPLANARITY 0.1mm MAX	±1°	EP-7(4+4)PIN		
CHECKED & APPROVED BY	BEN LEE	4<L≤16 ±0.2		UNIT:	PLASTIC MATERIAL:	UL REC.	
		16<L≤63 ±0.3	MM	PM9630	UL 94V-0		
 广州市申拓电子有限公司 SMD-TOP ELECTRONIC (GZ) CO.,LTD. TEL:020-84842698 FAX:020-84842398				ORIGIN:	METAL MATERIAL:	PIN TENSION LOAD:	
				GZ	PHOSPHOR BRONZE	1.0Kg MIN	
					DATE:	DRAWING NO.	REV.
					MAR 15'2008	ST-BB035.01	1



广州市申拓电子有限公司
SMD-TOP ELECTRONIC (GZ) CO.,LTD.

TEL:020-84842698

FAX:020-84842398